

PBL #000021696, dd: 2025.04.02

File: 210.45



Environmental Protection Agency

Head Office - Ganges Street, Sophia, Georgetown, Guyana.
Tel (592) 225-6048/44 225-5471/67 Fax: (592) 225-5481
Branch Office - Berbice (Whim, Corentyne) - Tel (592) 337-2201/2207
Linden (LEN Building, Mackenzie) - Tel (592) 444-2313

File Copy

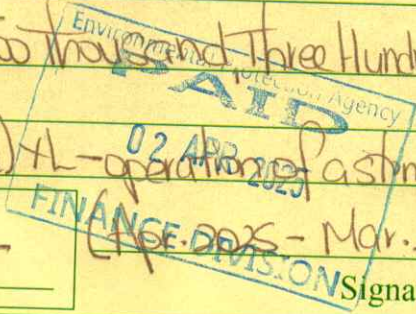
Date: 2025.04.02

No. 30532

Received From: Baracara Quarries Inc.

The Sum of: Six Hundred Fifty Two thousand Three Hundred and Ninety five Dollars \$652,395.00

For: Environmental Permit (Renewed) + operations of ashne quarry (Apr. 2025 - Mar. 2026)



Signature: [Handwritten Signature]

| | | | | |
|------|--------------------------|-------------------------------------|--------------------------|---------------|
| PAID | Cash | Cheques | Wire Transfer | Balance due |
| | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | Amt. \$ _____ |

[Signature]

(פרס. 1044 - 2005. 1044)

and which the dollars
furthermore will (be used) for - observation of a group of animals

Six Hundred Fifty two thousand three hundred

Barbara Thomas Inc.

30204 05

BBR #00005/PDP '99; 2022.04.05

21.01.12



**Environmental
Protection
Agency**

Ganges Streets, Sophia,
Georgetown, GUYANA
Tel.: (592)-225-0506
Fax: (592) – 225- 5481
Email: epa@epaguyana.org
Website: <http://www.epaguyana.org>

Environmental Permit (Renewed)

Issued under the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection (Amendment) Act, 2005, and the Environmental Protection (Authorisations) Regulations, 2000.

| | |
|----------------|---|
| Reference No.: | 20110120-BQIOO |
| Fee: | Extra Large - US\$ 3,100, per year |
| Fee Paid: | US \$ 3,100 (April, 2025 to March, 2026)- One (1) year. |
| Addressee: | Mr. Ashik Rahaman Managing Director Baracara Quarries Inc. 4, Water and Bulge Street Werk-en-Rust, Georgetown. |
| Activity: | Operation of a Stone Quarry |

Mr Ashik Rahaman, trading and operating under the name Baracara Quarries Inc, hereinafter referred to as the “Permit Holder”, is hereby authorised in accordance with the Environmental Protection Act, Cap. 20:05, the Environmental Protection (Amendment) Act, 2005, and the Environmental Protection Regulations, 2000, to operate quarry located at, Right Bank Mazaruni River, hereinafter referred to as the “Project”, in the manner indicated in the Application for Renewal of Environmental Authorisation submitted on February 01, 2024, and subject to the terms and conditions set forth herein under the Environmental Protection Act, Cap.20:05, existing and/or forthcoming Regulations made under the said Act, and/or any other applicable laws, best practices, guidelines and standards relevant to this project.

This is a Renewal of the Environmental Permit, Reference # 20110120-BQIOO, issued on September 19, 2018 and expired on July 31, 2023.

The Permit Holder, His Servants, Agents and Sub-Contractor shall comply with the following Terms and Conditions for Operation:

1.0 GENERAL

H. Lallu

Environmental Permit (Renewed)- Ref. No. 20190123- QBMRA

Issued under the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection (Amendment) Act, 2005, and the Environmental Protection (Authorisations) Regulations, 2000.

- 1.1 Prepare and submit to the EPA an Environmental Assessment Management Plan (EAMP) within the first **three (3) months** of the date that this Permit is issued, unless otherwise stated by the EPA. The EAMP shall include but not limited to any potential environmental impacts, human risks and feasible cost-effective measures to mitigate impacts so as to manage/reduce potential environmental impacts to biodiversity, water quality, air quality, and soil degradation to an acceptable level, a Monitoring and Emergency Plan, Closure and Reclamation Plan and any other consideration as required by the Agency.
- 1.2 The Environmental Assessment Management Plan (EAMP) required under **subsection 1.1** will inform the revision and updating of applicable conditions as set forth below and inclusion of any other conditions as the Agency sees fit to ensure protection of the environment and prevention or mitigation of pollution/contamination.
- 1.3 By the June 2025, commence the development system that would see the implementation of ISO 14001:2015 – Environmental Management Systems withing the operation of your Quarry facilities
- 1.4 Make an application to the Agency to vary this Environmental Permit in instances where it becomes necessary to:
 - i. change the construction, operation, structure, or layout of the facility and all associated buildings;
 - ii. change equipment, machine, apparatus, mechanism, system or technology serving the facility;
 - iii. Change the position and design of any outlet at the point or points of discharge of effluents; or effect any other change outlined in 20(3) of the Environmental Protection (Authorisations) Regulations.
- 1.5 Not undertake any development activity which may significantly affect the environment other than those activities covered by this Permit without prior approval from the EPA.
- 1.6 Continue to maintain all demarcated boundary limits for the site claim and the periphery of the concession as prescribed by the Guyana Geology and Mines Commission (GGMC). While maintaining demarcated boundary limits for the mine sites and a non-extractable, vegetated buffer zone at least 20 m wide as follows:
 - Between your mining blocks and other different contiguous land-use activities.
 - Around the mine site.
 - Around the property boundary.
 - Around any water source/spring located on the property.

Environmental Permit (Renewed)- Ref. No. 20190123- QBMRA

Issued under the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection (Amendment) Act, 2005, and the Environmental Protection (Authorisations) Regulations, 2000.

- 1.7 Adhere to the stipulations within the **Mining Act, No. 20 of 1989**, the **Mining Regulations** including the **Mining (Amendment) Regulations, 2005**, the **Explosives Act, Cap 16:06**, the **Blasting Operations Act, Cap 65:03**, and **Regulations of the Maritime Administration Department of the Ministry of Public Infrastructure**.
- 1.8 Ensure proper signage and security measures to keep unauthorized persons from accessing restricted and high-risk areas.
- 1.9 Ensure that transportation of quarry materials by tugs and/or barges to and from the project site does not encumber traffic on the Mazuruni River, and is done in accordance with the requirements of the **Maritime Administration Department**.

2.0 EMPLOYEES, OCCUPATIONAL HEALTH AND SAFETY

- 2.1 Adhere to the provisions of the **Occupational Safety and Health Act, Cap. 99:01, Laws of Guyana**.
- 2.2 Provide employees with training on good environmental management practices, occupational health and safety and of their obligations under this Permit on a regular basis.
- 2.3 Prepare and maintain a training file for all employees and third-party contractors, which should be available upon request to Officers of the Agency during an inspection.
- 2.4 Employees shall be equipped with Personal Protective Equipment relevant to the occupational tasks during operation. These Personal Protective Equipment (PPE) must include but not be limited to:
 - I. Safety helmets;
 - II. Protective respiratory devices
 - III. Safety boots with ankle support;
 - IV. Gloves with reinforced palms and fingers; and
 - V. Safety goggles.

(Employees shall at all times be well protected)

- 2.5 Prepare and maintain an employee log of distribution of Personal Protective Equipment, which should be available upon request to Officers of the Agency during an inspection.
- 2.6 Ensure that proper prophylactic or other acceptable measures are implemented to

Environmental Permit (Renewed)- Ref. No. 20190123- QBMRA

Issued under the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection (Amendment) Act, 2005, and the Environmental Protection (Authorisations) Regulations, 2000.

protect workers and other persons from malaria and other harmful diseases at the project site.

- 2.7 Provide and maintain adequate fire protection measures, in accordance with guidelines established by the Guyana Fire Service.
- 2.8 Provide first aid at the work site.
- 2.9 Ensure that communication and transportation systems are in place to respond to emergencies.

3.0 VEGETATION CLEARING, TOP SOIL STRIPPING AND RECLAMATION

- 3.1 Maintain natural vegetative cover as far as practical, especially in the vicinity of steep slopes occurring at project site and re-vegetate areas from which vegetation were removed.
- 3.2 Not store topsoil (overburden) within three meters (3m) of natural vegetation or mine face. Top soil and vegetation should be carefully stripped and stockpiled in an allocated area marked by a sign, so that it can be used for reclamation and re-vegetation as mining finishes.
- 3.3 Practice alternative methods of vegetation clearing rather than burning, such as, manual or mechanical felling or bulldozing.
- 3.4 Employ practical measures, such as growing of vegetation such as shrubs and grasses on stockpiles of topsoil to reduce erosion, and dust nuisance to surrounding ecosystems.
- 3.5 Store overburden stockpiles away from the drainage system at least **Two Hundred (200) meters** away from any water courses. Runoff from this overburden must be directed to the sedimentation/settling pond for treatment before discharge.
- 3.6 Maintain the integrity of areas where riparian vegetation is located to aid in mitigating erosion/sedimentation impacts at the site.
- 3.7 Where possible, topsoil should be placed directly onto an area being rehabilitated to reduce double handling of soil.
- 3.8 Consider the weather pattern before initiating major earthworks. Monitor areas of exposed soil during periods of heavy rainfall.
- 3.9 Take necessary precautions to avoid soil compaction, erosion, rutting, siltation and sedimentation during operation by limiting the size of the disturbed area, slope

Environmental Permit (Renewed)- Ref. No. 20190123- QBMRA

Issued under the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection (Amendment) Act, 2005, and the Environmental Protection (Authorisations) Regulations, 2000.

length and gradient, and the duration of soil exposure.

4.0 DRILLING AND BLASTING

- 4.1 Submit a detailed **Drilling and Blasting Plan**, approved by the Guyana Geology and Mines Commission, **One (1) Month** after issuance of the Permit. Adhere to the Protocols of the Drilling and Blast Plan; any modification of the said Plan must be approved by the Guyana Geology and Mines Commission and submitted to the Agency within **two (2) weeks** from date of approval.
- 4.2 Adhere to the protocols outlined in the Drilling and Blast Plan; any modification of the said Plan must be approved by the GGMC and submitted to the Agency within **two (2) weeks** from date of approval.
- 4.3 Ensure the use, storage, transport, handling, and general management of explosives are done in accordance with relevant laws and regulations including the **Explosives Act, 1989**, and subsequent amendments and the requirements of the Guyana Geology and Mines Commission and the Guyana Police Force.
- 4.4 Employ and utilise a drilling and blasting supervisor, who is certified and licensed by the Guyana Geology and Mines Commission (GGMC).
- 4.5 Ensure the appropriate blast design parameters are in place prior to the actual blasting. Attain minimum ground vibration by the utilisation of:
 - Appropriate delay intervals for charge ignition.
 - Appropriate pattern.
 - Orientation of blast holes.
 - Confinement of the charge.
- 4.6 Ensure secondary blasting is avoided as much as possible, rather, drop balling, using a heavy mass operated by a dragline should be considered.
- 4.7 Ensure that a review of the blast design is undertaken where necessary including the size of the Maximum Instantaneous Charges (MICs) and detonating sequence and that the correct stemming is in place.
- 4.8 Ensure that all measures such as the use of deck charges are utilised to reduce ground vibrations.
- 4.9 Ensure that all sites are evacuated and guarded before shots are fired. A distinctive **audible warning signal** must be given before firing and at the all-clear. In

Environmental Permit (Renewed)- Ref. No. 20190123- QBMRA

Issued under the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection (Amendment) Act, 2005, and the Environmental Protection (Authorisations) Regulations, 2000.

addition, notify nearby communities and homesteads of blasting times.

- 4.10 After the firing of Blast pattern, a Post Blast inspection must be conducted by a Certified Blaster/Shotfirer to identify any potential hazards or evidence of a misfire and/or the associated corrective action required to make the area safe before an "ALL Clear" is given prior to personnel and/or equipment being allowed back into blast radius.
- 4.11 Blast Pattern should be allowed a "Post Blast Fume Dispersion" time of **30-40 minutes** to allow prevailing winds or air currents enough time to readily dilute and dissipate to the atmosphere any gases generated in open pit blasting before the Re-entry of Personnel to this area.
- 4.12 After entering Blast radius any person experiencing sudden acute effects of coughing, shortness of breath or irritation of the mucous membranes of the eyes, nose or throat following post-blast Nitric Oxide (NOx) events must be examined by a medical practitioner without delay, even if no NOx smell was noticed or symptoms are mild.

5.0 CRUSHING PLANT

- 5.1 Ensure that the crushing plant and ancillary equipment are operated in strict compliance with the manufacturer's specifications.
- 5.2 Implement well-designed sprinklers located at strategic points to contain/reduce the level of fugitive dust being emitted into the environment.
- 5.3 The unloading area of crushers and conveyor belts are to be enclosed and provided with a dust suppression system.
- 5.4 Ensure at all times crushing equipment is secured to a reinforced base so as to reduce the level of vibration and noise emitted from this equipment.

6.0 ROADS

- 6.1 Ensure that the running surface of the road is crowned with a compacted layer and with good drainage on both sides to catch and direct water to the local drainage system.
- 6.2 Ensure that adequate and appropriate road signage is installed with provisions for safe line of sight along all access roads and tracks. Signs shall inform users of dangerous bends, crossing of haul trucks, vehicle speed limits, etc.

Environmental Permit (Renewed)- Ref. No. 20190123- QBMRA

Issued under the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection (Amendment) Act, 2005, and the Environmental Protection (Authorisations) Regulations, 2000.

- 6.3 Ensure that activities as they relate to operation and maintenance of roads, drainage ditches, culverts and or berms, etc. are done in a manner that results in minimal impact on public health and the environment.
- 6.4 Ensure that all reasonable and practical measures such as the provision of turnout drains at regular intervals are implemented to prevent erosion of roads. Runoff from roads, stockpile areas, etc., should not be discharged directly to natural water ways such as the **Mazuruni River and/ Creek, tributaries** within or contiguous to the Project site.
- 6.5 Ensure roads are sloped and constructed to minimise the likelihood of soil erosion.

7.0 WATER QUALITY MANAGEMENT

- 7.1 Adhere to the provisions of the **Environmental Protection (Water Quality) Regulations, 2000.**
- 7.2 Maintain the integrity of the existing waterways at all times. Discharges from sediment ponds or the operation into the **Mazuruni River and surrounding environment** should be in accordance with the Guyana National Bureau of Standards Interim *Guidelines for Industrial Effluent Discharge into the Environment* (IFC), US EPA and World Bank Water Quality Standards. The following maximum allowable limits should not be exceeded:

| Parameter(s) | Maximum Allowable Limits | Frequency of Monitoring |
|--------------------------------|---------------------------------|--------------------------------|
| pH | 5.0 – 9.0 | Bi- Annual |
| Temperature | <40°C | Bi- Annual |
| Biological Oxygen Demand (BOD) | <50 mg/L | Bi- Annual |
| Chemical Oxygen Demand (COD) | < 250 mg/L | Bi- Annual |
| Total Suspended Solids (TSS) | <50 mg/L | Bi- Annual |
| Oil and Grease (O&G) | <20 mg/L | Bi- Annual |
| Turbidity (NTU) | <50mg/L | Bi- Annual |
| Total coliform | < count/100ml | Bi- Annual |
| N as NH ₃ | <50mg/L | Bi- Annual |

Monitor the water quality for the parameters listed in above 7.2 above within the **Mazuruni River** on a biannual basis, (once in the wet season and once in the dry season).

And also;

- a) At the point of discharge from the quarry into sediment ponds;

K. Talwar

Environmental Permit (Renewed)- Ref. No. 20190123- QBMRA

Issued under the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection (Amendment) Act, 2005, and the Environmental Protection (Authorisations) Regulations, 2000.

- b) **Fifteen (15) meters** Upstream of sediment pond discharge point; and
 - c) **Fifteen (15) meters** Downstream of sediment pond discharge point.
- 7.3 Ensure that sediment control structures such as soak ways, settlement/water detention ponds and silt fences, are implemented at the site(s) to prevent the direct inflow of sediments to surface water.
- 7.4 Direct all waste lines and drains carrying grease, fats, or culinary oil, or similar waste products from the kitchen area into one or more grease trap interceptors. All required grease trap interceptors shall comply with the following:
- Be constructed of durable, corrosion-resistant materials and have water-tight covers securely fastened in place.
 - Have a flow rate sufficient to handle the maximum demand of the connected system.
 - Be installed at strategic locations to allow accessibility for convenient removal of the lid and internal contents.
 - Be designed and installed with proper venting to avoid becoming air bound.
 - Be properly cleaned and maintained according to the manufacturer's recommended frequency.
- 7.5 Ensure that waste/spoil piles are surrounded by perimeter berms to manage discharges of sediment; all runoff from this area shall be directed to a settling pond.
- 7.6 Ensure erosion susceptible areas are sloped, benched or lined with erosion control structures to manage surface runoff.
- 7.7 Establish and maintain a vegetative **two hundred (200) meters** buffer zone between the rock deposit and the **Mazuruni River** to reduce erosion.
- 7.8 Construct and maintain a good drainage system capable of handling the probable maximum precipitation storm event at all facilities. Storm water discharge should be directed into appropriately designed sediment ponds before discharge into surrounding waterways.
- 7.9 Maintain the settling ponds at the project site. The pond should allow for maximum retention time of waste water to allow for settling of suspended solids and natural degradation of possible contaminants prior to water being released to the natural environment.
- 7.10 Silt fences should be installed at discharge points of drainage systems to reduce the sediment loads entering sediment ponds.

Environmental Permit (Renewed)- Ref. No. 20190123- QBMRA

Issued under the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection (Amendment) Act, 2005, and the Environmental Protection (Authorisations) Regulations, 2000.

- 7.11 As far as possible, divert surface water runoff from higher mine benches to prevent it from reaching lower workings. Where possible, strategically place low permeability materials to restrict water flow into mining areas.
- 7.12 As far as possible, implement practical measures to prevent pollution of the **Mazuruni River**. Domestic waste water shall not be discharged directly into watercourses. Install a filter treatment system at the domestic water discharge point for further treatment before discharge.

8.0 HAZARDOUS MATERIALS/WASTE MANAGEMENT

- 8.1 Adhere to the provisions of the **Environmental Protection (Hazardous Waste Management) Regulations, 2000**, and the stipulations within the Pesticides and Toxic Chemicals **Act, No. 13 of 2000**, the Pesticides and Toxic Chemicals Regulations, No. 8 of 2004, the Pesticides and Toxic Chemicals (Amendment) Regulations, No. 8 of 2007.
- 8.2 The Hazardous Material Storage areas shall be clearly labelled, secured and well illuminated when not in use. The following warning signs shall be clearly posted:
- (a) Danger- Chemical Storage Area "Authorized Personnel Only"
 - (b) Read and Follow all label directions
 - (c) No Smoking
 - (d) No Eating or Drinking
- 8.3 Establish and maintain a register of hazardous materials or chemicals used or generated by the operation. Submit to the Agency, twice yearly (June and December), a report on hazardous waste generation and management for the previous six months including (please see attached form):
- The name, location and type of facility.
 - Types and quantities (in metric units) of hazardous waste generated.
 - Manner of storage, use, any applied treatment standards/methods and disposal of these substances.
 - Data concerning off-site shipments of waste, i.e. local disposal facility utilized, country to which hazardous waste is shipped, purpose of shipment and amount of waste shipped.
 - A summary of any accidents that may have occurred and any action taken.
 - Any waste minimization efforts undertaken by your facility for hazardous material/waste.
 - Any other matter the Agency may require.

The Agency considers all materials listed in Schedule I and II of the Environmental

Environmental Permit (Renewed)- Ref. No. 20190123- QBMRA

Issued under the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection (Amendment) Act, 2005, and the Environmental Protection (Authorisations) Regulations, 2000.

Protection (Hazardous Wastes Management) Regulations, 2000, to be hazardous. (Please see attached list.)

- 8.4 (a) Collect and store waste oils, used batteries, and any other hazardous waste on site until ready for disposal in a manner approved by the EPA.
- (b) Refrain from draining fuel/ lubricants, including waste oils of any quantity from equipment on to the ground and waterways.
- 8.5 Contain all chemicals securely and conform to the safety conditions as outlined in the Material Safety Data Sheet for each chemical. Keep all chemicals in well-sealed and individually labeled containers and properly store in an impervious and well-ventilated room/bond.
- 8.6 Safety Data Sheets for all hazardous materials shall be readily available and easily accessible at all times at the Facility.
- 8.7 Take the necessary precautionary measures during the transport, transfer, use and handling of all hazardous material.
- 8.8 Implement a programme to ensure regular and preventative maintenance of machinery and equipment to prevent leaks and minimize air emissions and hydrocarbon releases.
- 8.9 All hazardous waste shall be stored in a covered, bunded area. This area shall include the following:
- (a) Signage- "Hazardous Waste Storage Area";
 - (b) Low traffic;
 - (c) No floor drains; and
 - (d) Secondary containment capable of containing 110% of the largest volume therein.
- 8.10 Do not service vehicles in mining pits except in instances of emergency repairs.
- 8.11 Maintain emergency spill cleanup kits on site for response to spills.
- 8.12 A fully stocked first- aid kit shall be readily available at the hazardous storage Facility.
- 8.13 Material storage containers shall be inspected weekly for signs of leakage or corrosion and damaged containers must be replaced immediately. Inspection Reports must be maintained and signed by the appropriately qualified inspecting officer and his/her supervisor.
- 8.14 Elevate all waste oil/ chemical tanks and containers so that leaks are easily identifiable.
- 8.15 Store all lubricants, coolant, acid-generating materials, waste oil and any material

Environmental Permit (Renewed)- Ref. No. 20190123- QBMRA

Issued under the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection (Amendment) Act, 2005, and the Environmental Protection (Authorisations) Regulations, 2000.

contaminated with hydrocarbons such as used filters and oily rags in an approved manner, such as in drums or surface tanks with impervious bunds to contain spillage. Ensure that the areas assigned for storage of the aforementioned materials are located away from operating areas, drainage lines and major waterways.

- 8.16 Collect, store, transport and dispose of Medical Waste in accordance of the Company's approved Bio-medical Waste Management and Transport Regulations.

9.0 FUEL HANDLING AND STORAGE

- 9.1 Fuel shall at all times be stored above-ground, in a cool, dry place and away from ignition sources. 'No Smoking' signs shall be posted where fuel is handled or stored.
- 9.2 Construct and maintain an impervious secondary containment wall around fuel storage tanks, creating a temporary holding area in the event of accidental spillage. The containment wall for areas with multiple tanks must have the capacity to provide at least 110% containment of the largest tank. The containment wall for areas with solitary tanks must have the capacity to provide 110% containment of each fuel tank. The containment wall MUST be fully sealed to prevent spillage into the receiving drainage system.
- 9.3 Existing secondary containment around the fuel tanks shall be inspected monthly for cracks and breakage to ensure they are liquid tight to withstand hydrostatic pressure.
- 9.4 All piping must enter or exit the containment over the wall and no part of the tank infrastructure (e.g. dispenser, filling hoses and valves) shall protrude outside the containment.
- 9.5 Ensure that adequate signage is installed in fuel storage areas, such as No Smoking, Flammable Materials, etc.
- 9.6 Protection measures for fuel storage tanks such as painting and coating shall be maintained to minimize corrosion of fuel tanks.
- 9.7 Maintenance and/ or repair of fittings, pipes and hoses shall be conducted monthly and in accordance to manufacturer's specifications. A summarized inspection report shall be compiled and submitted to the Agency as part of the Annual Report required in condition 13.2.
- 9.8 Secondary containment, drip trays or other overflow and drip containment measures shall be installed and maintained at connection points or other possible overflow points.
- 9.9 Leak detection systems shall be installed on all fuel tanks. At least two (2) of the following measures should be implemented:
- (a) Overflow alarms on tanks;

Environmental Permit (Renewed)- Ref. No. 20190123- QBMRA

Issued under the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection (Amendment) Act, 2005, and the Environmental Protection (Authorisations) Regulations, 2000.

- (b) Gauging system;
- (c) Dipstick measurements;
- (d) Sensors on walls of tanks; or
- (e) Electric shut down buttons.

10.0 WASTE MANAGEMENT

- 10.1 Adhere to the provisions of the **Environmental Protection (Litter Enforcement) Regulations, 2013.**
- 10.2 Promote proper solid waste management and disposal practices at your facility. Waste shall not be disposed of in or near the waterways. Reduction and reuse of waste should be promoted.
- 10.3 Ensure that solid waste pits are located at least **one hundred (100) meters** away from watercourses, or habitation. The waste sites should be constructed above the ground water table and lined to the floor with an impervious earthen or other material to prevent leaching to ground water.
- 10.4 Maintain good house-keeping, sanitary and hygienic practices and the aesthetic quality of the surroundings at all times.
- 10.5 Ensure that garbage receptacles are placed in strategic locations within the project site. Have separate bins to facilitate the collection and sorting of waste according to liquid and solids; organic and inorganic; degradable and non-degradable. Used tyres and batteries should be re-used or disposed of in a manner approved by the EPA.
- 10.6 Maintain **new or existing** pit latrine (s): according to the following requirements:
 - I. The environs of the **latrine/latrines** shall be kept clean, in a hygienic manner and maintained both internally and externally. The latrines shall be:
 - Built with suitable materials such as hardwood or concrete materials;
 - maintained on a clay mound to prevent surface water from entering;
 - Properly vented with a tall ventilation pipe located on the windward side;
 - Fitted with a fly screen on top of the vent to prevent the passage of flies and mosquitoes. The meshed apertures (holes) of the fly screen must not exceed 1.5 millimeters, made with corrosion resistant material to withstand intense rainfall, high temperatures and strong sunlight;

Environmental Permit (Renewed)- Ref. No. 20190123- QBMRA

Issued under the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection (Amendment) Act, 2005, and the Environmental Protection (Authorisations) Regulations, 2000.

- II. Positioned at least thirty (30) meters away from surface and ground water sources, creeks, wells or springs;
 - III. Dug at least 0.6 meters above the average water table and at least four (4) meters away from any dwelling (such as camps, residential areas and any sleeping and living quarters, etc.);
 - IV. Easily reached during bad weather and will not cause odour.
 - V. When the maximum capacity is reached **latrine (s)** shall be covered with at least 0.3 meters of soil and a suitable site determined for another.
- 10.7 Maintain the septic tank system at all times, ensuring adequate cleaning and de-sludging. Any modification to the Septic Tank (s) must be in accordance with the *Guyana National Bureau of Standards (GNBS) Code of Practice for the Design and Construction of Septic Tanks and Associated Secondary Treatment and Disposal Systems*.
- 10.8 All on-board waste from the tugs and barges should be collected and disposed of at the intended destination. **At no time, should waste be dumped over-board.**

11.0 AIR QUALITY MANAGEMENT

- 11.1 Adhere to the provisions of the **Environmental Protection (Air Quality) Regulations, 2000.**
- 11.2 Monitor ambient air quality in accordance with the locations and protocol outlined in the Environmental Management Plan dated April 23, 2021, to determine compliance with the requisite Standards. Comply with the World Health Organization (WHO) and the United States Environmental Protection Agency (USEPA), 2016 Air Quality Guidelines for Particulate Matter in the Environment, not exceeding the limits below:

| Air Pollutant | Maximum Pollutant Level |
|---------------------------------|--|
| PM _{2.5} | 10 µg/m ³ annual mean |
| | 25 µg/m ³ 24-hour mean |
| PM ₁₀ | 20 µg/m ³ annual mean |
| | 50 µg/m ³ 24-hour mean |
| Total Suspended Particles (TSP) | Primary 75 µg/m ³ annual geometric mean |
| | Primary 260 µg/m ³ 24-hour mean |
| | Secondary 60 µg/m ³ annual geometric mean |

Environmental Permit (Renewed)- Ref. No. 20190123- QBMRA

Issued under the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection (Amendment) Act, 2005, and the Environmental Protection (Authorisations) Regulations, 2000.

| | |
|--|--|
| | Secondary 150 µg/m ³ 24-hour mean |
|--|--|

And the; World Health Organization (WHO) and EAS Inc. Indoor Air Quality Guidelines:

| Air Pollutant | Maximum Pollutant Level | |
|---------------|-------------------------|-----------------------|
| TVOC | 0.3mg/m ³ | 300 µg/m ³ |
| | 0.5 mg/ m ³ | 500 µg/m ³ |
| HCHO | 0.1mg/m ³ | 100 µg/m ³ |

- 11.3 Conduct monitoring for the parameters listed in condition 11.2 on an annual basis and submit results to the EPA as a component of the Environmental Annual Report required in **condition 13.2**. Readings shall be obtained at the following locations, but not limited to:
- Haul Roads
 - Overburden Stockpiles;
 - Finished product stockpile;
 - Aggregate processing area;
 - Quarry pit; and
 - Housing Area
- 11.4 All internal roads on the project site should be soaked as needed in areas close to housing to not exceed ambient dust conditions.
- 11.5 Establish and maintain the vegetative buffer zone of **two hundred (200) meters** between the Quarry and the Teperu creek and other contiguous land uses to buffer noise and fugitive dust emissions.
- 11.6 Ensure measures are taken to avoid or reduce dust pollution from the mines. Dust suppressants i.e. water soaking etc. shall be used during dry season and as necessary.
- 11.7 Install enclosures and dust suppression systems on the mobile and fixed crushing plant, screening plant and other equipment.
- 11.8 Respond to equipment malfunction or **inefficiencies** which may result in visible emissions to air. In the event of malfunction leading to abnormal emissions the operator shall:
- a) investigate and undertake remedial action **immediately**;
 - b) adjust the process or activity to minimise those emissions; and
 - c) record the events and actions taken.

Environmental Permit (Renewed)- Ref. No. 20190123- QBMRA
Issued under the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection
(Amendment) Act, 2005, and the Environmental Protection (Authorisations) Regulations, 2000.

- 11.9 As far as possible, site and orient material stockpiles and storage areas to reduce wind exposure.
- 11.10 Ensure that the exhaust stack of the generator is of an appropriate height, preferably at least **two (2) meters** above the tallest building nearby, to minimise adverse fumes/soot impacts to contiguous areas.
- 11.11 Employ all practical measures along haul roads, stockpile areas, and other necessary areas to control and prevent fugitive dust impacts during operation of the plant. Dust-suppression methods, such as wetting, should be used, as necessary. Special consideration should also be taken of prevailing wind direction, where necessary.

12.0 NOISE MANAGEMENT

- 12.1 Adhere to the provisions of the **Environmental Protection (Noise Management) Regulations, 2000.**
- 12.2 Comply with the Guidelines for Noise Emissions into the Environment, not exceeding the limits below at a distance of 15 m (50 ft) from the source or property boundary, whichever is closer.

Industrial Limits **100dB** (Day-time (06:00-18:00 h))
80 dB (Night –time (18:00-06:00 h))

- 12.3 Equip all sound - making devices, e.g. generators, planers, etc. with silencers or mufflers to reduce noise level and/ or enclose all sound making devices in structures constructed with materials of good insulation properties (e.g. hollow concrete blocks, insulation boards, solid clay bricks, etc.)
- 12.4 Ensure that the exhaust stack of the generator is of an appropriate height, preferably above the tallest building nearby, to minimise adverse fumes/soot impacts to contiguous areas.
- 12.5 Ensure that all equipment and machinery are placed on foundations properly designed to ensure effective damping of vibrations.
- 12.6 Operate and service all mechanical equipment in accordance with manufacturer's specifications at all times. Additionally, ensure that mechanical equipment and vehicles are regularly maintained and work at their optimal levels to minimise atmospheric emissions.

13 BIODIVERSITY PROTECTION

Environmental Permit (Renewed)- Ref. No. 20190123- QBMRA

Issued under the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection (Amendment) Act, 2005, and the Environmental Protection (Authorisations) Regulations, 2000.

- 13.1 Establish vegetation around production facilities and along access roads to mitigate the impact on terrestrial resources.
- 13.2 Avoid blasting/intense construction activities during sensitive biodiversity seasons of the year as advised by the Guyana Wildlife Commission.
- 13.3 Undertake construction, including clearing of vegetation at a pace slow enough to ensure that terrestrial animals and aquatic life can move to other locations.
- 13.4 Report all occurrences of illegal wildlife trapping and trading to the EPA and Wildlife Management Authority.
- 13.5 Prohibit employees from the capturing, killing and trading of all Wildlife from the project area in accordance with the Wildlife Conservation and Management Act, 2016.

14 COMPLIANCE MONITORING AND REPORTING

- 14.1 Monitor the implementation of the conditions of this **Operation Permit (Renewed)**, insofar as they involve adherence by employees and all third parties under your direction.
- 14.2 Submit **Environmental Annual Reports** to the EPA on or before **March 31** every year on your compliance with this Permit.
- 14.3 Ensure the reports and records of monitoring include the following:
 - The names of the individuals and designations, who conducted sampling, prepared and compiled the reports;
 - The date, place/location, time, weather conditions, techniques and methods used in sampling;
 - The date the measurements were compiled or analysed and the names of the individuals who compiled the information;
 - Observations, readings, calculations, benchmarks, bench data, the results of analyses;
 - Limitations of the sampling process and all other occurrence at the time of study, which may affect the results;
 - Photographs and drawings of all relevant aspects of the operation; and
 - The state of operation of facilities at the time of measurement, including planned and unplanned shutdowns, production levels and achievement of design capacity, identification of release point, source of release and substances being released.

Environmental Permit (Renewed)- Ref. No. 20190123- QBMRA

Issued under the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection (Amendment) Act, 2005, and the Environmental Protection (Authorisations) Regulations, 2000.

- 14.4 Comply with any lawful directions given by the EPA from time-to-time in furtherance of the implementation of any international or other obligations for the environmental protection.
- 14.5 Inform the Agency prior to or within **thirty (30) days** of any change of name or ownership of the operation.
- 14.6 Notify the Agency within **twenty-one (21) days** in event of bankruptcy, liquidation or receivership of the Permit Holder or if the Company becomes a party to an amalgamation.
- 14.7 Notify the EPA **within one (1) hour** of the occurrence of any environmental emergencies such as a sudden disaster, accident, natural, technological or human induced factors that cause or threaten to cause severe environmental damage as well as harm to human health or livelihood.
- 14.8 Report to the Agency of non-compliance with the **Operation Permit (Modified)**:
 - 14.8.1 Within **twenty-four (24) hours** of the time the Holder of the Operation Permit (Modified) becomes aware of the non-compliance, the anticipated manner in which it may endanger human health or the environment.
 - 14.8.2 Within **seventy-two (72) hours**, submit to the Agency a written report containing a description of the non-compliance, its cause and the period of non-compliance including exact dates and time.
 - 14.8.3 Submit a report to the Agency indicating the reasons and the anticipated time it is expected to continue if the non-compliance has not been corrected.
- 14.9 Implement relevant measures/agreements to avoid conflicts with other land users/communities. Conflicts should be reported to the relevant authorities if they occur.
- 14.10 Inform the **National Trust and Walter Roth Museum** if any artefacts of archaeological and anthropological significance are unearthed during BK Quarries Inc. operations.
- 14.11 Submit to the EPA the results of all periodic audits conducted by the GGMC.
- 14.12 Immediately notify the EPA within **one (1) hour** of any accidental release of contaminants or incidence of pollution into the environment. The Permit Holder shall provide the financial, equipment and technical capacity to adequately respond to any emergency that may occur on site and emergency response shall be immediate.
- 14.13 Submit to the Agency a detailed **Project Closure Plan** for approval **two (2) years** prior to closure. Thereafter, the closure plan will be updated and reviewed at a frequency agreed to with the Agency, as needed.

K. Saha

Environmental Permit (Renewed)- Ref. No. 20190123- QBMRA

Issued under the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection (Amendment) Act, 2005, and the Environmental Protection (Authorisations) Regulations, 2000.

15 INSTITUTIONAL AUTHORITY/LIABILITIES

- 15.1 The Permit Holder shall be strictly liable for any loss or damage to the environment through any act caused intentionally or recklessly, through the adverse effect of any discharge or release, or cause or permit the entry of pollution, contaminant in any amount, concentration or level in excess of that prescribed by the regulations or stipulated by any environmental authorisation which are attributed to any Project (and more specifically petroleum activities). S. 19(1) and (2) of the Environmental Protection Act, Cap. 20:05, Laws of Guyana.
- 15.2 The Permit Holder shall comply strictly with section 39 (1), (2), (3) and (4) of the Environmental Protection Act Cap 20:05, Laws of Guyana.
- 15.3 The Permit Holder shall strictly observe section 19 (3) of the Environmental Protection Act Cap 20:05, Laws of Guyana.
- 15.4 The Permit Holder may be liable for environmental damage due to pollution from its activities within Guyana.
- 15.5 The EPA reserves the right to conduct regular inspections of the Permit Holder's operation as part of its monitoring and enforcement requirements under the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection (Amendment) Act, 2005, and the Environmental Protection (Authorisations) Regulations, 2000.
- 15.6 The Permit Holder shall, at all times, allow entry to the Permitted facility to any Officer designated by the EPA for the purposes of conducting inspections or any other legitimate business of the Agency. Pursuant to s. 38 of Environmental Protection Act, Cap. 20:05, it is an offence to **assault, obstruct or hinder** an authorised person in the execution of his/her duty under the said Act or its Regulations and the Permit Holder be liable to penalties prescribed under paragraph (c) of the Fifth Schedule for doing so.
- 15.7 The EPA reserves the right to review/amend the conditions attached to this Permit, which also includes the review and/or amendment of permit fees in consideration of any changes in fee structure as determined by the Agency for projects of this nature.
- 15.8 The EPA shall have the right to cancel or suspend this Permit for breach of any of the terms and conditions contained herein.
- 15.9 This Operation Permit (Modified) is not the final consent; all relevant permission should be obtained from other regulatory bodies for continued operation.
- 15.10 The Permit Holder shall compensate any Party who suffers any loss of damage as a result of the attributed project. (Part V, s.19 (3) (e) of the Environmental Protection

Environmental Permit (Renewed)- Ref. No. 20190123- QBMRA

Issued under the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection (Amendment) Act, 2005, and the Environmental Protection (Authorisations) Regulations, 2000.


Act, Cap. 20:05, Laws of Guyana.

- 15.11 The Permit Holder shall be responsible for the payment of all cost related to the assessment of damage and costs for the independent assessor(s).
- 15.12 The Agency (EPA) shall notify the Permit Holder immediately of any written claim or notice sent by any complainant seeking loss or damage for negligence as a result of the Permit Holder lack of due care and diligence.
- 15.13 Should the Permit Holder contravene or is likely to contravene any condition of this Permit, the Agency (EPA) may serve on him an enforcement notice in accordance with s. 26 of the Environmental Protection Act, Cap.20:05, Laws of Guyana.
- 15.14 Where it appears to the Agency (EPA) that the Permit Holder is engaged in any activity that may pose serious threat to natural resources or serious pollution of the environment or any damage to public health, the Permit Holder shall be issued with a Prohibition Notice Order to immediately cease the offending activity in accordance with s. 27 Environmental Protection Act, Cap. 20:05, Laws of Guyana.
- 15.15 The Permit Holder shall be liable of any gross negligence or willful misconduct caused by the Permit Holder and/or Agents, to the marine environment, biodiversity, protected species and natural habitat with respect to any release or discharge, spill, contaminant fluids, oil or lubricants from the fuel storage at any facilities permitted under this project.
- 15.16 This Permit is effective for the period stipulated herein **April, 2025 to March, 2026.**
- 15.17 This Environmental Permit (Renewed) shall remain valid until **March 31, 2026** **unless** otherwise cancelled, suspended, modified or varied in accordance with the provisions of this Permit or the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection (Amendment) Act, 2005, and the Environmental Protection (Authorisation) Regulations, 2000.
- 15.18 This Permit must be renewed by submitting a completed *Application Form for Renewal of Environmental Authorization* to the Agency at least six months before this Permit expires, that is, no later than **September 30, 2025.**
- 15.19 Any late submission of renewal application(s) after the specified date as stated above, shall require the Permit Holder to pay, in addition to the renewal fee, a late penalty fee (accruing at the time such obligation was first owed for renewal) at a rate of **two thousand dollars (\$2,000.00) per day for every day late**, until such renewal application is submitted to the Agency, without prejudice to any other rights of the Permit Holder in connection therewith.

Environmental Permit (Renewed)- Ref. No. 20190123- QBMRA


Issued under the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection (Amendment) Act, 2005, and the Environmental Protection (Authorisations) Regulations, 2000.

- 15.20 Failure to comply with the requirements of this Permit shall render the Permit Holder liable to prosecution and to civil penalties and/or injunctive reliefs prescribed under the Environmental Protection Act, Cap. 20:05, Law of Guyana, the Environmental Protection (Amendment) Act 2005, and the Environmental Protection (Authorisations) Regulations 2000, including under any existing and forthcoming regulations made under the said Act or any other applicable Laws of Guyana.

Signed by  on behalf of the Environmental Protection Agency.
Mr. Kemraj Parsram
Executive Director

Date: 4.1.2025

I hereby accept the above terms and conditions upon which this Operation Permit (Modified) is granted and agree to abide by the Environmental Protection Act, Cap. 20:05, Laws of Guyana, the Environmental Protection (Amendment) Act, 2005, the Environmental Protection (Authorisations) Regulations, 2000, and any existing or forthcoming regulations, best practices, guidelines and standards made under this Act.

| | |
|--------------|--|
| NAME: | KELWAWAN LAKHAN |
| DESIGNATION: | MANAGER |
| SIGNATURE: |  |
| DATE: | 2. 4. 25 |

